



Please refer to the instruction manual of preparation stage to carry out the pre-treatment before applying the coating.


● Items to be used



Coating agent



Subdividing container  
x1



Application sponge  
x1



New Micro Suede  
(for wet wiping) x3 / (for dry wiping) x1

## 1 Subdividing stage

**[Items to be used]**

Coating agent, Subdividing container

Before the application, subdivide the coating agent into the subdividing container according to the sizes of vehicles.

**Notes**

• 20-25ml is applicable for one standard-sized vehicle.



## 2 Application stage


**[Items to be used]**

Coating agent, Application sponge

Pour 2-3ml of coating agent on the sponge.



Then start to apply it evenly and thinly on the painted surface. Make sure not to apply on the same area repeatedly as it will cause unevenness of coating. Please apply the coating quickly through both vertical and horizontal movement without missing any areas.

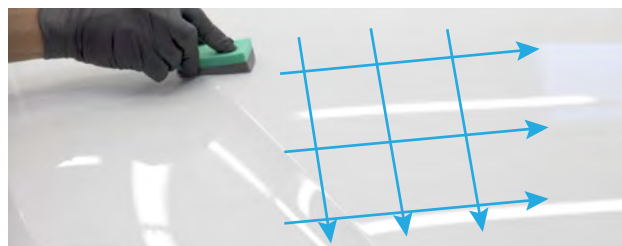

When the liquid on the sponge is not enough, please pour 1-2ml of coating agent on the sponge again and apply it to the whole painted surface.




### 3 Wiping stage

**【Items to be used】**

**New Micro Suede (for wet wiping)**

After application, please wait for 1hour  
(Working temperature: 15-25°C humidity: 30-60%).

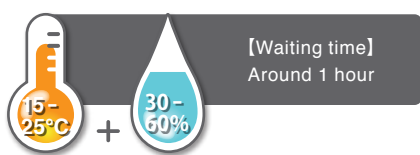

**Notes**

- If you try to wipe off immediately after application, the coat may become unstable.
- The waiting time after application should be adjusted according to the environment.



First, prepare a slightly wet Micro Grid Cloth.



**Notes**

- Wet wiping can improve the hydrolysis effect. It is not necessary to wring the cloth too strongly. Make sure that cloth has sufficient moisture.

Wipe the surface of each panel by a wet cloth according to the sequence of application. Keep wiping straightly in one direction until no more liquid remains.



**Notes**

- Please keep changing the sides of cloth while using. Once all the sides of a cloth are used, please exchange with a new one. 3 pieces of cloth are recommended for a standard-sized vehicle.



## 4 Finishing stage

### [Items to be used]

#### New Micro Suede (for dry wiping)

After wet-wiping a panel, immediately use another dry Micro Grid Cloth to wipe off the wiping marks completely.



Continue to repeat the step 3-4 at other panels.

### Notes

- This product is supposed to be used for coating 1 layer normally. However, it is also applicable to 2 layers coating. Although the thickness of coat and gloss increase by repeated coating, wiping will be more difficult to be done and unevenness will easily occur, etc. Therefore, it is suggested to test before use. In addition, please finish the whole painted surface once before applying the second coat.
- Please do not touch the surface and do not drive in the rain within 6 hours after the application. The surface of the coating will become dry in about 6 hours and completely harden in around 2 weeks after the application.



## ! How to deal with unevenness of coating?

If unevenness is found after wiping or application, please polish the whole panel of that area to completely remove the coating. Then reapply the coating again.



### [Cautions for storage and handling]

- \*The unopened product should be stored at dry cool place (around 5-15°C and without direct sunlight). The shelf life of unopened product is around 8 months. If the product is stored inside the refrigerator, condensation may occur inside the container when the temperature suddenly rises and it may make the product unusable.
- \*It is recommended to use up the subdivided liquid once poured out from the original container. However, if it is stored in a dry cool place no longer than 14 days and there is no change in color, viscosity and hardness, it can be used again. In this case, please test if there is really no change first.